




Intended for long and short distance
on all types of winter road

MICHELIN XDW ICE GRIP

RELIABILITY AND SAFETY
ON ICE AND SNOW.

DRIVE AXLE*



245/70 R 19.5
265/70 R19.5
12 R 22.5
275/70 R 22.5
295/80 R 22.5
315/70 R 22.5
315/80 R 22.5







INCREASED SECURITY

FOR ALL KIND OF TRANSPORTS ON
ICE AND HARD PACKED SNOW!

* Can be used on steer axle as well in extrem winter conditions


MICHELIN XDW ICE GRIP

SAFETY	BUSINESS EFFICIENCY	ECOLOGY
 <p>"Transport safely on winter roads!"</p> <ul style="list-style-type: none"> • Excellent grip on ice- and snow covered roads • High resistance to damage • Excellent stability  <ul style="list-style-type: none"> • M+S marking • 3PMSF • More than 2000 three-dimensional sipes in the tread pattern that locks together • Very wide tread • New rubber compound for optimal grip on winter roads 	 <p>"Long mileage!"</p> <ul style="list-style-type: none"> • Good mileage result • Great comfort • Reach your destination whatever is the weather <ul style="list-style-type: none"> • Special rubber compound that is very resistant to wear • The special design of the shoulder with a lot of sipes gives a comfortable ride on snowy and uneven ground • Suitable for a variety of transports like timber transport, distribution, general cargo, refrigerated... 	 <p>"A greener way to transport!"</p> <ul style="list-style-type: none"> • MICHELIN Remix tyres perform as well as new MICHELIN XDW ICE GRIP tyres while saving between 26 and 52 kg of material • Regroove the tyre and extend its lifespan when it consumes the least fuel <ul style="list-style-type: none"> • Up to 95% retreading rate⁽¹⁾ • All MICHELIN XDW ICE GRIP tyres are manufactured in Europe-based ISO 14001 - certified factories <p><small>(1) Internal MICHELIN source. Average retreading acceptance rate calculated using the XDW ICE GRIP casings sent in for Remix.</small></p>

MICHELIN XDW ICE GRIP


Theoretical regrooving depth	Width	Blade
H = 3 mm or H = 4 mm (80 profil)	6 to 8 mm	R3

Regroovable and retreadable in MICHELIN Remix®

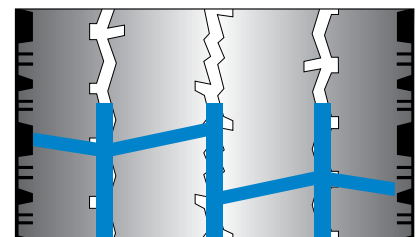

REGROOVING DESIGN

TECHNICAL DATA

Size and tread pattern	Load and speed index	Unique point	Recommended rim	EUROPEAN LABELLING		
						
245/70 R 19.5 XDW ICE GRIP	136/134L	—	6.75	E	C	 72 dB
265/70 R 19.5 XDW ICE GRIP	140/138L	—	7.50	E	C	 72 dB
12 R 22.5 XDW ICE GRIP	152/148L	—	8.25	E	C	 72 dB
275/70 R22.5 XDW ICE GRIP	148/145L	—	7.50	E	C	 72 dB
295/80 R 22.5 XDW ICE GRIP	152/149L	—	8.25	E	C	 72 dB
315/70 R 22.5 XDW ICE GRIP	154/150L	—	9.00	D	C	 72 dB
315/80 R 22.5 XDW ICE GRIP	156/150L	—	9.00	E	C	 72 dB



Learn more,
go to www.trucks.michelin.eu
and  www.youtube.com/michelintrucktyres

